

The SGW series Semi-Commercial Greywater Recycling System was designed and developed to fill the void between the residential greywater and commercial greywater systems. The SGW series is in fact, a combination of both the RGW and CGW Series utilizing the portability of a residential system combined with the pumping power of a commercial system.

The SGW series system starts as a combined 500 litre (132 USG) Primary holding tank, four-cartridge filtration system, controlled chlorination system and 2hp pump station built on a durable aluminum support assigned as the SGW-500. The versatile SGW series can be adapted by the addition of secondary 500 litre (132 USG) holding tanks also on durable aluminum supports that gives the SGW series increased greywater storage capacity.


SGW-500: 500 litre (132 USG) Primary single holding tank unit.

SGW-1000: 1000 litre (264 USG) Primary unit plus one additional secondary holding tank.

SGW-1500: 1500 litre (396 USG) Primary unit plus two additional secondary holding tanks.

SGW-2000: 2000 litre (528 USG) Primary unit plus three additional secondary holding tanks.

The SGW series systems include a 3hp constant pressure inverter controller and 2hp centrifugal pump capable of 34 GPM at 56 psi as standard.

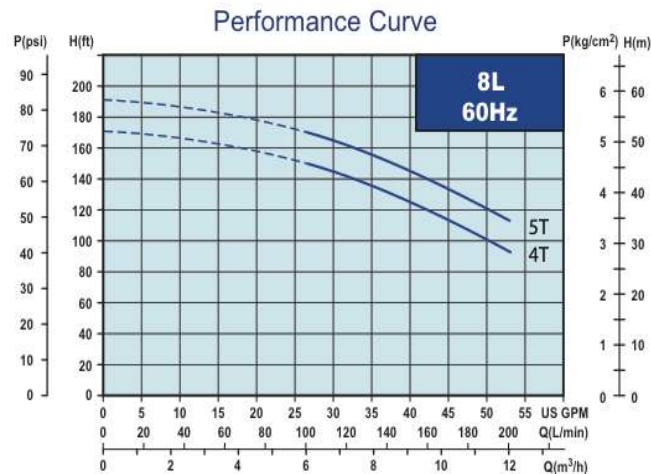

#### SGW Series Includes:

- 2hp 56 psi Pump
- Cartridge filtration system
- Controlled chlorination
- BCC-100 Electronic controller
- Extra cartridge filters
- Durable aluminum support
- WYE strainer
- 

#### Applications:

- Motels
- Hotels
- Office Buildings
- Community Centers
- Homeless Shelters
- Libraries
- Apartment Buildings

#### PUMP SPECIFICATIONS

Model	Controller (HP)	Pump (HP)	Cycle (Hz)	Phase (φ)	Voltage (V)	Inlet/Outlet	Pre-Set (psi)	H Max (ft)	Q Max (GPM)
8L4T	3	2	50/60	1/3	230/460	2"	56	130	34
8L5T	3	2	50/60	1/3	230/460	2"	72	160	30

#### SGW DIMENSIONS & CONNECTIONS

Storage Tanks	Capacity (L/US Gal)	Tank Diameter (inch)	Height (iinch)	Weight (lbs)	Base Size (inch)	Greywater Inlet (Inch)	Greywater Outlet (Inch)	Fresh water Inlet (inch)	Overflow (inch)	Drain Inch)	Vent (inch)
Primary	500/132	30"	61"	250	31.5 x 48	3"	2"	¾" MPT	3"	2"	3"
Secondary	500 / 132	30"	46"	150	31.5 x 33.5	N/A	N/A	N/A	3"	2"	3"

The content of this Data Sheet is based upon the latest information available at the time of printing and is aimed at providing a general introduction to Greyster Systems Inc. products. No warranty or representation is hereby made by Greyster Systems Inc. as to the accuracy of said information. Greyster Systems Inc. is continually updating and improving its products and reserves the right to amend, discontinue, alter or change specifications and prices without prior notice.